

# OFFICE OF THE MARION COUNTY SURVEYOR

## SECTION RECORD CORNER

SECTION 13 TOWNSHIP 15 RANGE 4

DATE: 4-17-02 8-8-07

PARTY CHIEF: Wilcoxen

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 7-6-97




IN. S.P.C. E ZONE NAD '83

NAME: 15041303

N: 500299.4018(m)

E: 69198.7267(m)

Line of Prospect 1100 S

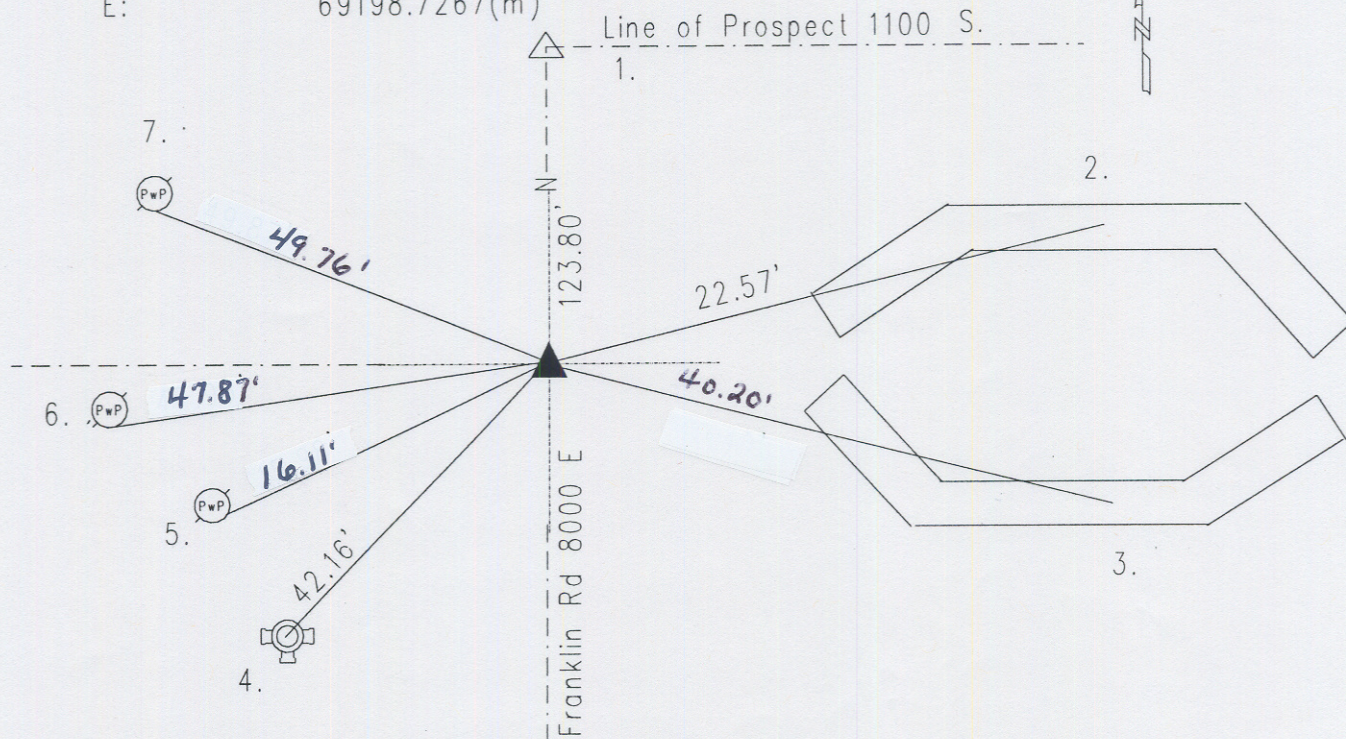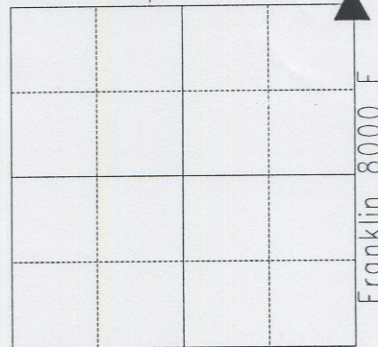

Original post set 1820 by hendricks with witness: 18" hickory S 14 E 12 links;  
14" beech S 34 W 21 links per Marion County Atlas pg. 10. McCoyner 3-10-1899  
called stone with no witness per Warren township Legal Survey Book pg. 20.  
Monroe 7-22-59 called 1/2" iron rod over stone. Monroe 7-18-63 called same.  
MCSO 2-20-70 called PK nail. McConahay 8-30-74 called same. Greene  
8-29-88 called same. Kiste 12-13-95 called same. Wilcoxen excavated 7-2-97  
and rebar was found 6" down. Harrison set. Re-tied 4-17-02 by Wilcoxen.  
15041303

REF.	DISTANCE	DESCRIPTION
1.	123.80'	Due N to NW corner 18-15-5 Harrison
2.	22.57'	Cut 'x' center concrete headwall
3.	40.20'	Cut 'x' center concrete headwall
4.	42.16'	Top nut of fire hydrant
5.	16.11'	PK nail w/shiner SE PwP#134-579 8"up
6.	47.87'	Mag nail w/shiner S PwP#321-579 8"up
7.	49.76'	PK nail w/shiner S PwP#533-579 5"up